(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 3 November 2005 (03.11.2005)

PCT

(10) International Publication Number WO 2005/104315 A1

(51) International Patent Classification⁷: H01S 5/0683, 5/00

(21) International Application Number:

PCT/US2005/013561

(22) International Filing Date: 21 April 2005 (21.04.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 60/564,143

21 April 2004 (21.04.2004) U

- (71) Applicant (for all designated States except US): CEYX TECHNOLOGIES, INC. [US/US]; 3645 Ruffin Road, Suite 101, San Diego, CA 92123 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SANCHEZ, Jorge [US/US]; 15655 Oakstand Road, Poway, CA 92064 (US).
- (74) Agent: REIDELBACH, Charles, F., Jr.; Higgs, Fletcher & Mack LLP, Suite 2600, 401 West A Street, San Diego, CA 92101 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


of inventorship (Rule 4.17(iv)) for US only

Published:

with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DIGITAL SIGNAL PROCESSING ENHANCED LASER PERFORMANCE COMPRISATION

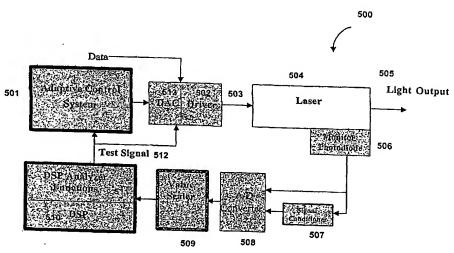

(57) Abstract: Methods for controlling lasers or other light emitting devices to compensate for performance degradations due to temperature changes and aging without disrupting the transmission of information are presented. Disclosed embodiments describe various methods of applying mathematical models and digital signal processing algorithms to continuously calculate and execute precise output power adjustments. A synthesized test signal is injected into the normal data stream is applied to the laser system. The magnitude of the test signal is sufficiently small that it is buried in system noise and will not alter the noise margin of the signal or the transmitted data. Micro-detection, recovery and digital signal processing of the embedded test signal produces precisely monitored output power and modulation amplitude measurements used to accurately adjust performance characteristics regardless of temperature or age.

BEST AVAILABLE COPY

WO 2005/104315 A1

 before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.